
Item Number <sub>-</sub>	
Project	
Quantity	



	$\perp$	
•	$\subseteq$	<u> </u>
)	Ч	



718/388.5860 customerservice@townfood.com



townfood.com



# **SR-24-G-2X Double-Grate-Top Stock Pot Stove**

PICTURED WITH OPTIONAL UNDERSHELF



This double stock pot stove delivers blindingly-fast performance, for braziers, stock or saute. Metal valve handles, with heat-shield protection, from the combustion chamber, stay cool. Welded all stainless steel construction, including optional undershelf and drip tray, assure sturdy and reliable use. Rear gas connection, with pressure regulator, are standard. High-powered 3-ring burners, with clog resistent pilots.

The SR-24-G-2X is a high-quality stockpot range, built for hard use. A work horse of a range, the SR-24-G-2X will meet the needs of even the most demanding chefs.

### **FEATURES**

- 'Stay Cool' valve handles
- Solid construction
- 2 cast iron tops, with an easy-to-clean front ledge


#### **OPTIONS**

- Caster set
- Stand/undershelf
- Wok adapter for SR-24 grate top
- Insulated, double-wall construction

**MODEL SIZES, WEIGHTS AND MEASUREMENTS** 

MODEL NO. **DEPTH SHIP WEIGHT GAS CONNECTION MBTUH WIDTH HEIGHT** 18″¹ 11/4" SR-24-G-2X-N/P 241/4" 38" 450 lb. 274 N (natural gas), P (propane)

# STANDARD DIMENSIONS AND TECHNICAL DATA

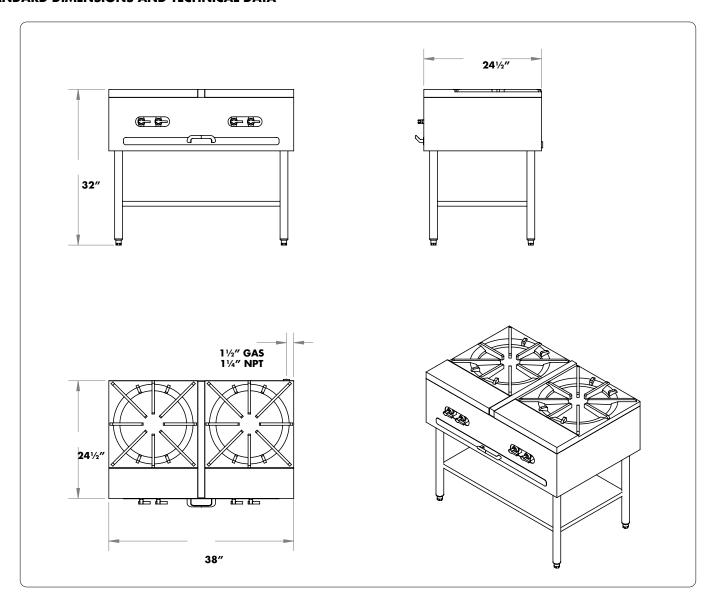

# **IMPORTANT**

Commercial gas range(s) must be installed in accordance with state and local codes, or in the absence of local code with the NATIONAL FUEL GAS CODE- ANSI Z223.1. COMPLIANCE WITH ALL CODES IS THE RESPONSIBILITY OF THE OWNER AND THE INSTALLER.

COMMERCIAL GAS UNITS NEED ADEQUATE VENTILATION SYSTEMS. REFER TO National Fire Protection Association Standard No. 96- "Vapor Removal from Cooking Equipment"

MINIMUM CLEARANCES- COMBUSTIBLE AND NON-COMBUSTIBLE: Back Wall- 6" Left and Right Sides- 6" For use on non-combustible floors only.

### TOWN RESERVES THE RIGHT TO CHANGE DESIGN WITHOUT NOTIFICATION.

